


Install the tutorial of (full coverage water block for ZOTAC PGF OC RTX2080Ti)

INSTALL TUTORIAL (DEMONSTRATION)




1.Remove the red position screws in the picture

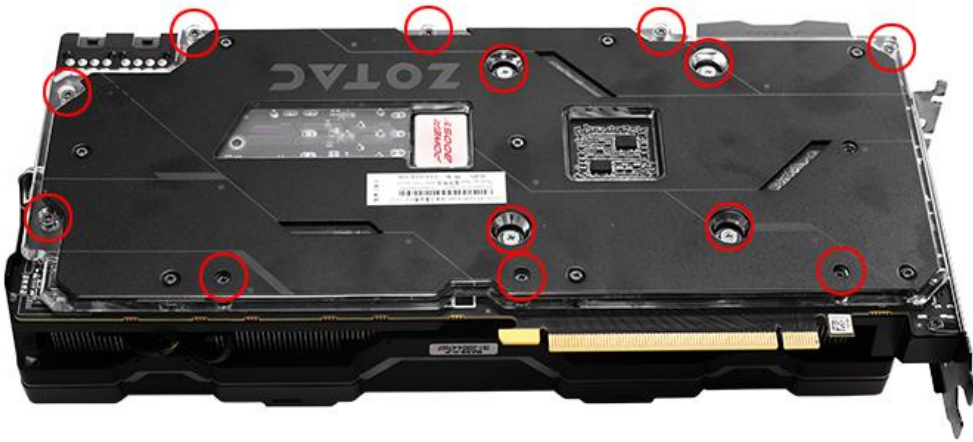


2.Remove the red position screws in the picture




3.Remove the red position screws in the picture

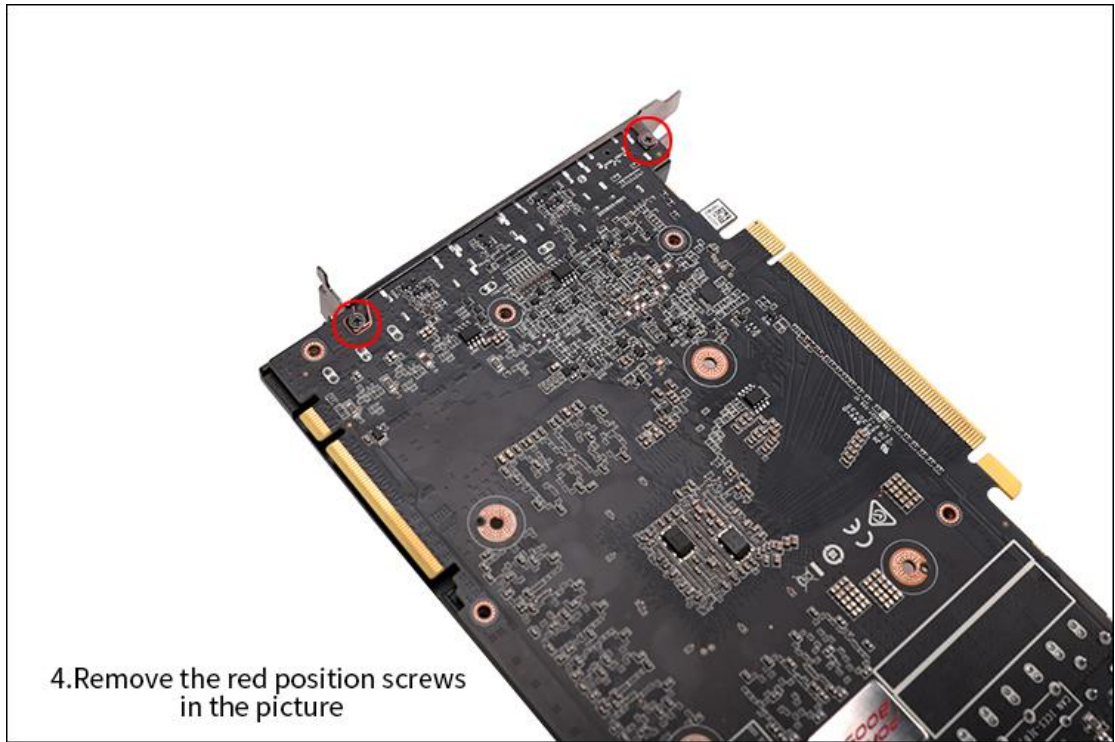


4.Remove the red position screws in the picture

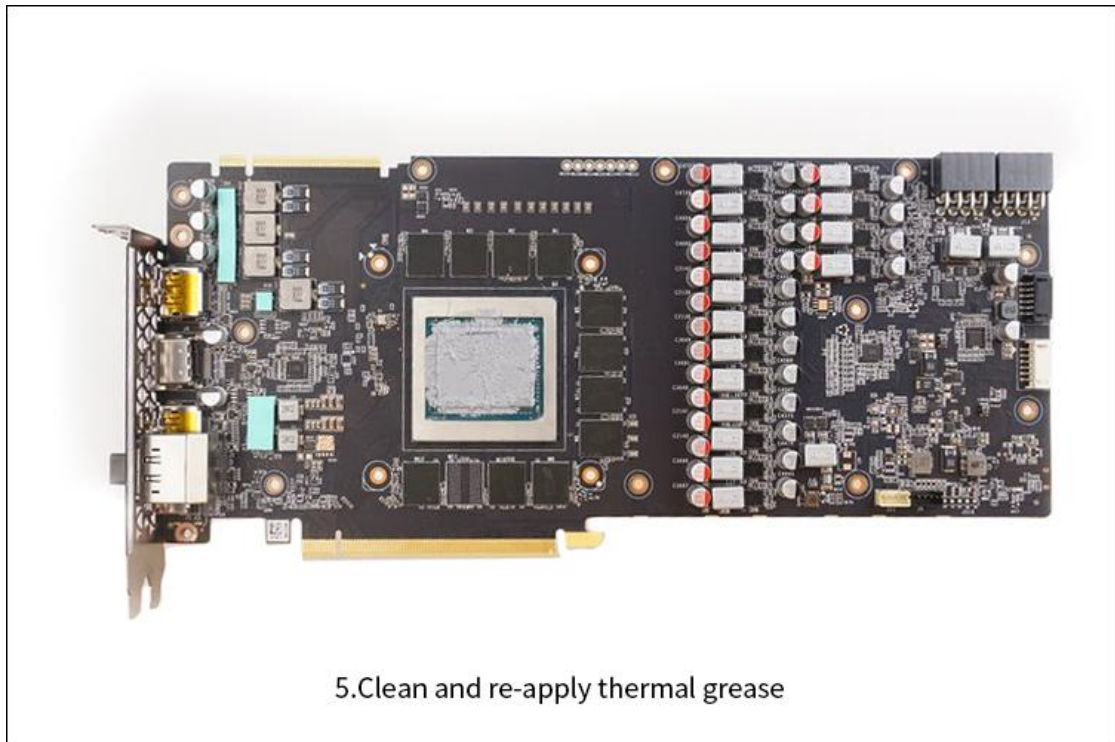


5.Clean and re-apply thermal grease

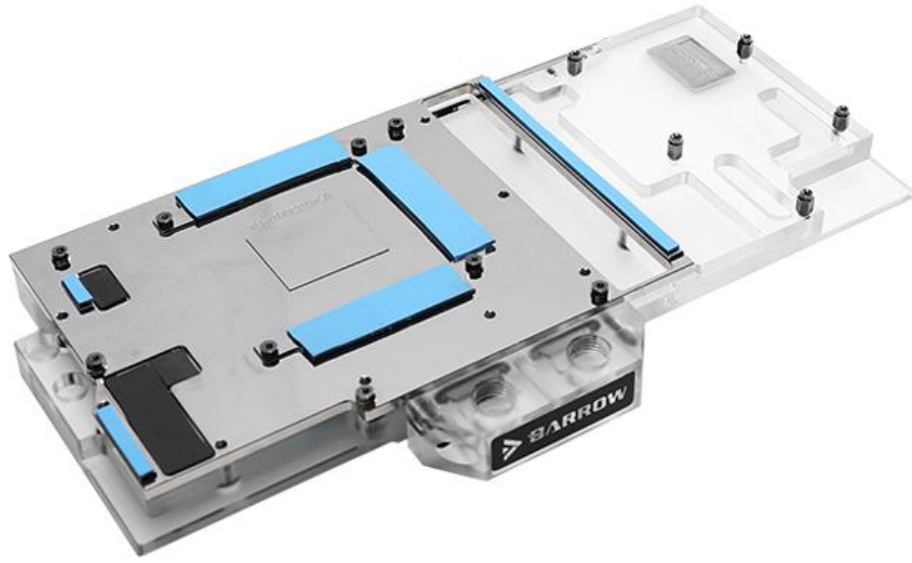


6. Stick the corresponding specifications of thermal grease in the corresponding position, paying attention to the cutting size

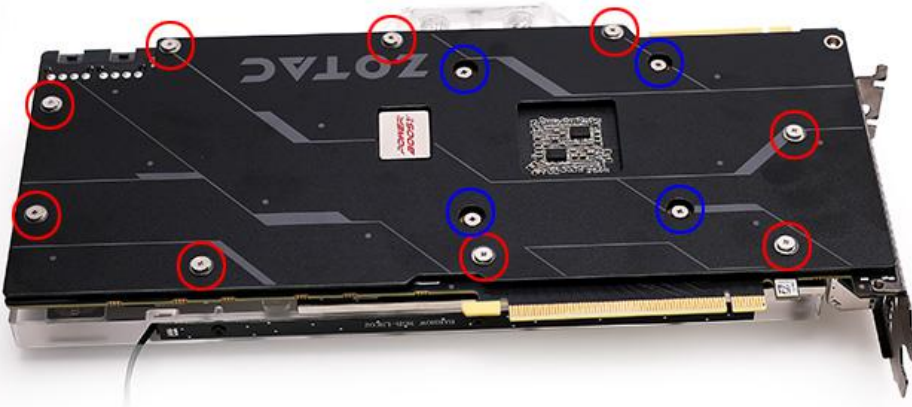

7. Install in the red/blue position screws in the picture
(When Installation don't contain backplane of lighting lamp panel ,in addition to spring screws in the red/blue position,the other is M2*1.5*8.5 grub screws)

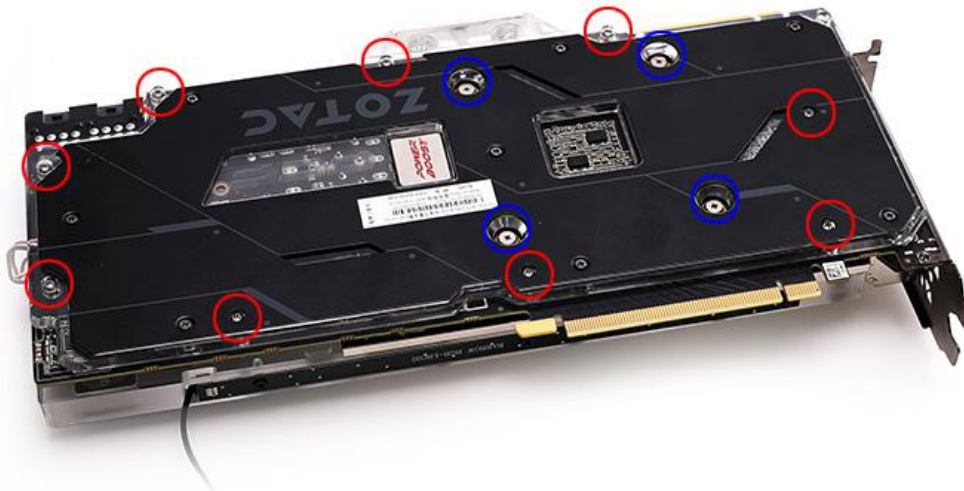

8..Install in the red/blue position screws in the picture
(When Installation don't contain backplane of lighting function panel,in addition to spring screws in the red/blue position,the other is M2*8 half-round head screws)

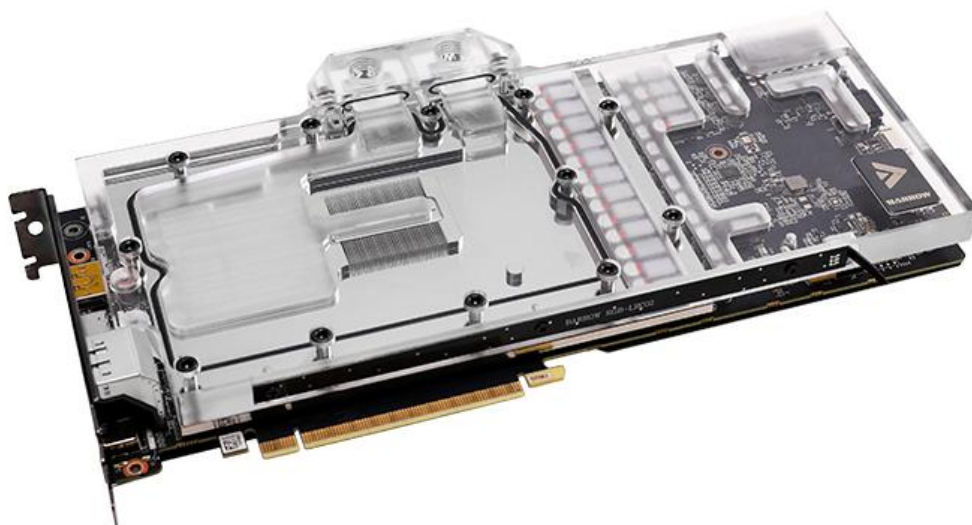


9.The installation is complete

DEMONSTRATION INSTALLATION TUTORIAL (DRAWING)

STEP 1: REMOVE ORIGINAL RADIATOR


THE FIRST STEP: ORIGINAL RADIATOR REMOVED THE FIRST STEP: ORIGINAL RADIATOR REMO



Original GPU




Unscrew the GPU backplane screws




Remove the original fan power cable along with the original radiator

STEP 2: APPLY GREASE/STICK SILICON PAD


THE FIRST STEP: ORIGINAL RADIATOR REMOVED THE FIRST STEP: ORIGINAL RADIATOR REMOVEDAL RADIAT



Clean up the residual grease on the circuit board and the chip, then re apply a thin layer ones .




Cut the thermal gel pad into the appropriate size




Stick them to the GPU heat chips

STEP 3: INSTALL WATER BLOCK


THE FIRST STEP: ORIGINAL RADIATOR REMOVED THE FIRST STEP:



Put the GPU water block backplane screws on the GPU screw holes and make sure they are at the correct spot.



the GPU backplane hole fit to the water block base hole, then lock by screws



Done

* Note:

If the GPU backplate is not installed, please place the insulation gasket on the mounting hole and lock it with a spring screw. This is general installation demonstration tutorial. The specific installation details may be slightly different depend on the GPU cards, in kind prevail.